


HIGH SPEED BLOWN FILM EXTRUDER HDPE / LDPE / LLDPE

MODEL: SE-JE45/JE55/JE65

MODEL: SE-JE35/SE-JE45M

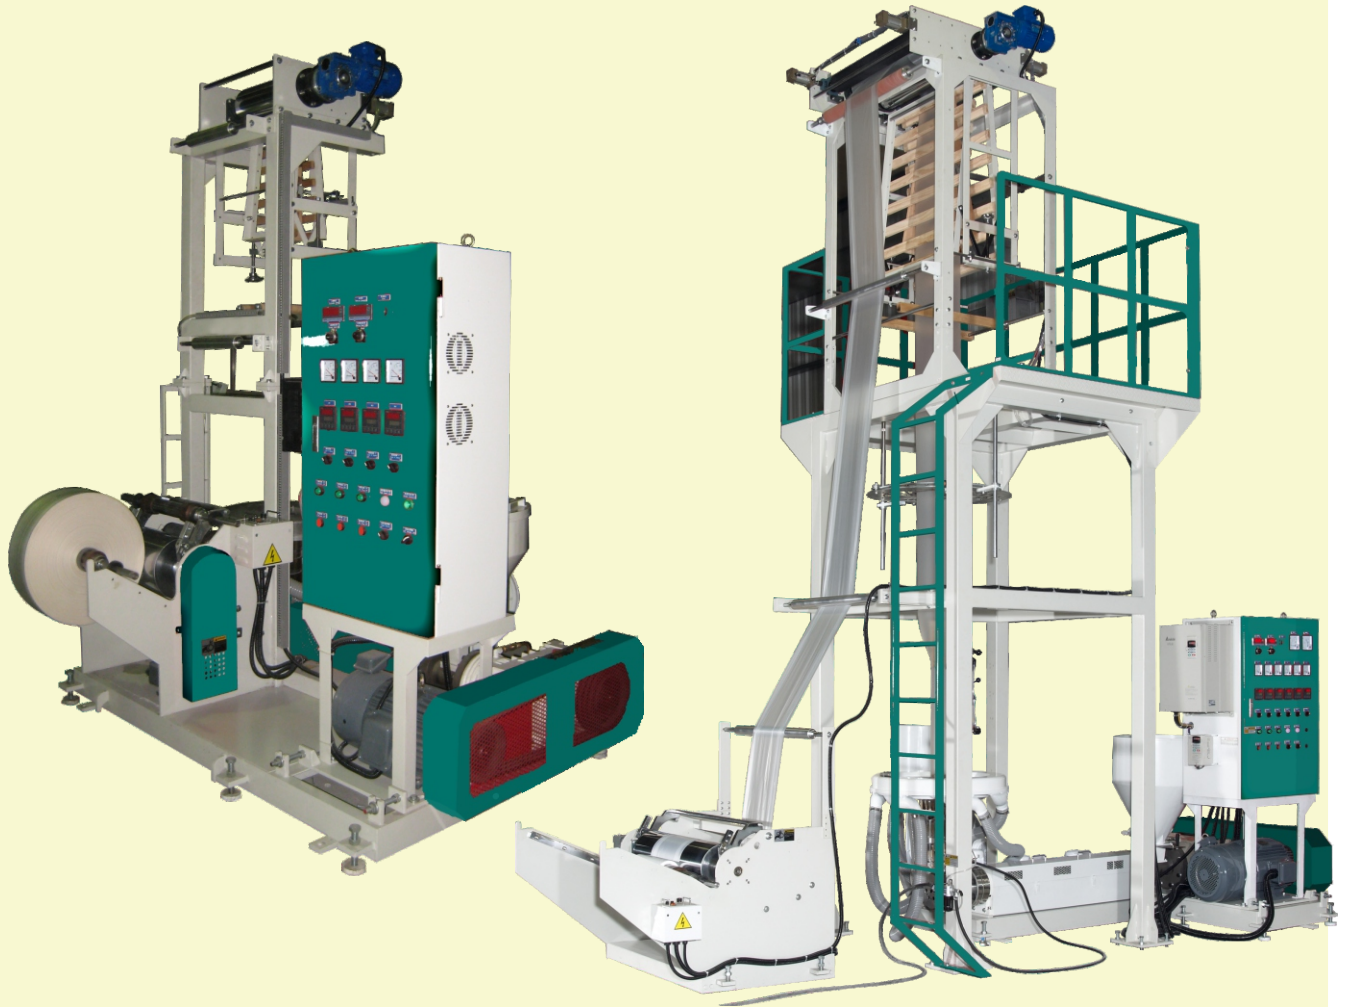

MODEL	SE-JE35	SE-JE45M	SE-JE45	SE-JE55	SE-JE55	SE-JE65
Raw Material	-300	-600	-600	-800	-1100	-1300
Film Width(mm)	100~250	200~525	200~525	300~750	350~1000	450~1200
Thick of Film(mm)	HDPE:0.008~0.055mm			LDPE:0.015~0.8mm		
Extrusion Output (Kg/Hr)	HDPE:20KG LDPE:26KG	HDPE:40KG LDPE:50KG	HDPE:40KG LDPE:50KG	HDPE:80KG LDPE:90KG	HDPE:80KG LDPE:90KG	HDPE:100KG LDPE:115KG
Screw Dia. L:D	φ 35mm 28:1	φ 45mm 28:1	φ 45mm 28:1	φ 55mm 28:1	φ 55mm 28:1	φ 65mm 30:1
Main Motor	10HP	20HP	20HP	40HP	40HP	50HP
Die Size	φ 40	φ 80	φ 80	φ 120	φ 140	φ 175
Air Blower	2HP	3HP	5HP	5HP	5HP	7.5HP
Power Require	20KW	32KW	32KW	45KW	45KW	55KW
Machine Height	2.6M	3.5M	4.0M	5.2M	5.2M	6.2M
Optional Equipment	Auto loader, Manual screen changer, Embossing Roller, Double winder, Air Shaft, Rotating device, Surface Treater, Chiller, 2nd Take-up roller(only for SE-JE55/JE65)					



Acerpack Plastic Machine Co ; Ltd .

<http://www.acerpack.com>

[mail:service@acerpack.com](mailto:service@acerpack.com)